


MODEL: BAFKIT2X2L70V — CEILING SPEAKER ASSEMBLY

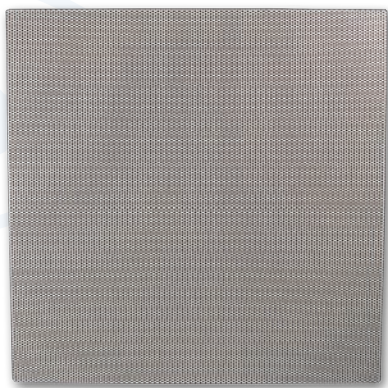

BAFKIT2X2L70V

FEATURES

- Pre-Assembled Kit for Time-Saving Installation
- No Visible Hardware After Installation
- Acoustically-Correct Baffle Design Blends with Ceiling Tiles
- Mar-Proof Baked White Epoxy Finish
- Can Be Installed Before Ceiling Tile Installation
- Premium Quality 8" Speaker with Matching 70 Volt Transformer
- Matched Components for High Quality Performance
- Speaker Tap Selector Control Mounted on Backbox

SPECIFICATIONS

Speaker Type: 8 inch (20.3 cm) Permanent Magnet

Power Rating: 8 Watts RMS

Sensitivity: 93 dB @ 1 meter with 1 Watt input

Frequency Response: 65 to 17,000 Hertz

Magnet: 5 oz. (141.7 g) PM

Voice Coil Impedance: 8 ohms

Voice Coil Diameter: 0.75 inches (1.9 cm)

Transformer: 70V; taps at ¼, ½, 1, 2 and 4 Watts

Baffle: White, 22-gauge cold-rolled steel

Baffle Size: Width: 23-3/4" (60.3 cm)

Length: 23-3/4" (60.3 cm)

Depth: 3-3/8" (8.6 cm)

Weight: 6 lbs. 1 oz. (2.8 kg)

DESCRIPTION

The pre-assembled Rauland BAFKIT2X2L70V can immediately "lay in" to a new or existing ceiling grid and be wired to finish the installation. The BAFKIT2X2L70V Ceiling Speaker Assembly consists of a US0188-type, 8" loudspeaker complete with a 70V line matching transformer, mounted on a 2 foot by 2 foot lay-in baffle, and an integrated backbox that runs the full length of the baffle.

Installation is swift and simple, because time-consuming tile sculpting is not required. The BAFKIT2X2L70V is designed with a feature to allow attachment

of safety straps when required. With a tap selector switch on the backbox, an installer can quickly select an appropriate power level of either ¼, ½, 1, 2 or 4 Watts.

The BAFKIT2X2L70V Ceiling Speaker Assembly is particularly suitable for use in hospitals, classrooms, hallways, meeting rooms, or any area that requires a flush mount, concealed speaker with excellent sound reproduction quality. The BAFKIT2X2L70V Speaker Assembly is packaged as a complete unit that significantly reduces installation time and project costs.

Architect and Engineer (A&E) Specifications available online at: customerconnection.rauland.com
Specifications subject to change without notice

©Copyright 2008 Rauland-Borg Corporation Printed in USA Rev 06/08

USA • 800-752-7725 • Fax 800-217-0977
Canada • 905-607-2335 • Fax 905-607-3554
www.rauland.com



Rauland-Borg Corporation